




Button Nozzle, Single 15°, .030 Orifice

Domed button nozzle with 1 orifice, 15 degrees off center, .030 in orifice. Fits all H200 modules.

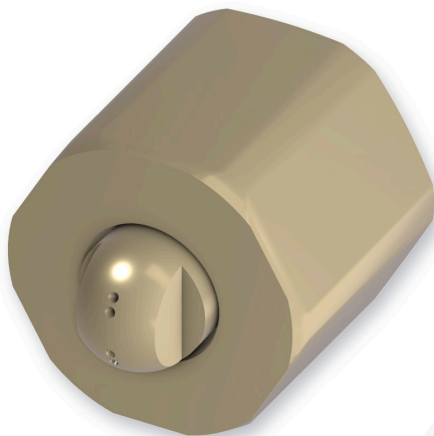


Button body, typical. Orifice layout varies by pattern.

Specifications

Nozzle type	Button (domed)
Pattern	Single 15°
Orifices	1 orifice, 15 degrees off center
Stream angles	15° from the centerline
Orifice diameter	.030 in
Orifice tolerance	±.0005 in
Material	Phosphor brass
Fits	All H200 modules
Store SKU	T2C80A6S

Spray pattern

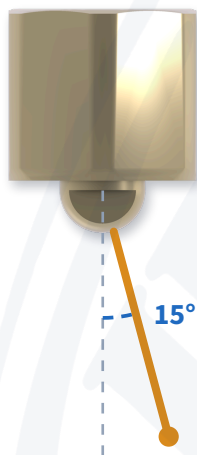

Single 15°, side view shooting down, drawn to the chart angles.

Cross references

Replaces Nordson®	238016
Graco InvisiPac	130801

About button nozzles

- Button nozzles are one piece, precision drilled brass with no insert.
- Precision drilled holes shoot straighter.

Where the beads land

Stream	0.5 in 12.7 mm	1 in 25.4 mm	1.5 in 38.1 mm	2 in 50.8 mm	2.5 in 63.5 mm	3 in 76.2 mm
15°	0.16	0.29	0.43	0.56	0.70	0.83
one side	4.1	7.5	10.9	14.3	17.7	21.1

Product distance from the tip across the top. Offset from the nozzle centerline, inches in bold, millimeters in gray. Approximate: pressure, temperature, viscosity and line speed move the bead.

