




Button Nozzle, Triple 30°, .016 Orifice

HMS-N-238038

Replaces Nordson® 238038

Domed button nozzle with 3 orifices, 30 degrees across (center and ± 15), .016 in orifice. Fits all H200 modules.

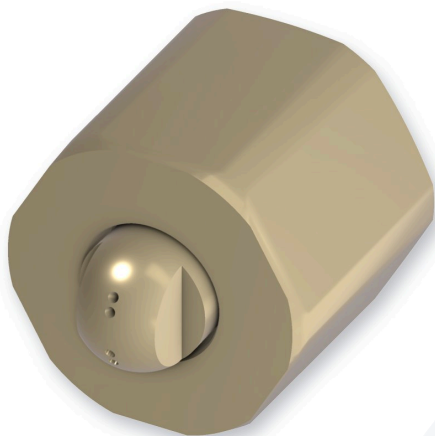


Button body, typical. Orifice layout varies by pattern.

Specifications

Nozzle type	Button (domed)
Pattern	Triple 30°
Orifices	3 orifices, 30 degrees across (center and ± 15)
Stream angles	0°, $\pm 15^\circ$ from the centerline
Orifice diameter	.016 in
Orifice tolerance	$\pm .0005$ in
Material	Phosphor brass
Fits	All H200 modules
Store SKU	T2C80C8S

Spray pattern

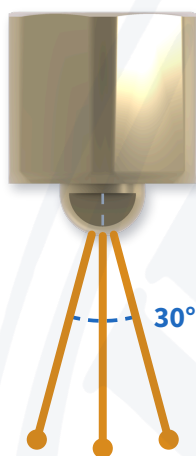

Triple 30°, side view shooting down, drawn to the chart angles.

Cross references

Replaces Nordson®	238038
Graco InvisiPac	130606
Valco	972xx605

About button nozzles

- Button nozzles are one piece, precision drilled brass with no insert.
- Precision drilled holes shoot straighter.

Where the beads land

Stream	0.5 in 12.7 mm	1 in 25.4 mm	1.5 in 38.1 mm	2 in 50.8 mm	2.5 in 63.5 mm	3 in 76.2 mm
15° each side	0.16 4.1	0.29 7.5	0.43 10.9	0.56 14.3	0.70 17.7	0.83 21.1

Product distance from the tip across the top. Offset from the nozzle centerline, inches in bold, millimeters in gray. Approximate: pressure, temperature, viscosity and line speed move the bead. The center stream lands on the centerline.

Nordson is a registered trademark of Nordson Corporation. Hot Melt Supply Company is not affiliated with Nordson Corporation. Part numbers are used for identification only. Graco numbers are InvisiPac nozzles of the same geometry. Graco and InvisiPac are trademarks of Graco Inc. Hot Melt Supply Company is not affiliated with Graco Inc. Valco is a trademark of its respective owner. Hot Melt Supply Company is not affiliated with Valco. Specifications are for identification and service reference. Always follow the equipment manual.



Product page