


Button Nozzle, Triple 45°, .016 Orifice

Domed button nozzle with 3 orifices, 45 degrees across (center and ± 22.5), .016 in orifice. Fits all H200 modules.

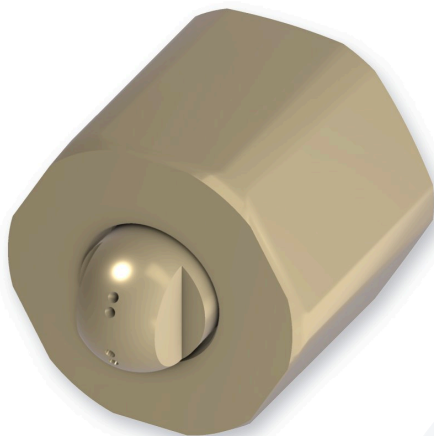


Button body, typical. Orifice layout varies by pattern.

Specifications

Nozzle type	Button (domed)
Pattern	Triple 45°
Orifices	3 orifices, 45 degrees across (center and ± 22.5)
Stream angles	0°, $\pm 22.5^\circ$ from the centerline
Orifice diameter	.016 in
Orifice tolerance	$\pm .0005$ in
Material	Phosphor brass
Fits	All H200 modules
Store SKU	T2C80E2S

Spray pattern

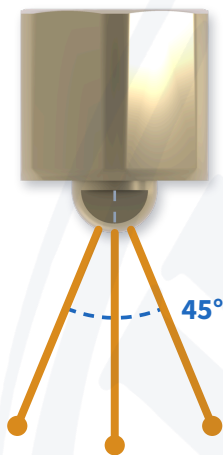

Triple 45°, side view shooting down, drawn to the chart angles.

Cross references

Replaces Nordson®	238042
Graco InvisiPac	130608

About button nozzles

- Button nozzles are one piece, precision drilled brass with no insert.
- Precision drilled holes shoot straighter.

Where the beads land

Stream	0.5 in 12.7 mm	1 in 25.4 mm	1.5 in 38.1 mm	2 in 50.8 mm	2.5 in 63.5 mm	3 in 76.2 mm
22.5° each side	0.25 6.3	0.46 11.6	0.66 16.8	0.87 22.1	1.08 27.3	1.28 32.6

Product distance from the tip across the top. Offset from the nozzle centerline, inches in bold, millimeters in gray. Approximate: pressure, temperature, viscosity and line speed move the bead. The center stream lands on the centerline.

