




Button Nozzle, Dual 45°, .016 Orifice

HMS-N-238528

Replaces Nordson® 238528, 708725

Domed button nozzle with 2 orifices, 45 degrees apart, .016 in orifice. Fits all H200 modules.

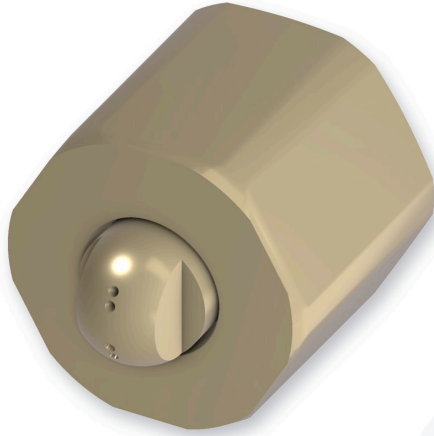


Button body, typical. Orifice layout varies by pattern.

Specifications

Nozzle type	Button (domed)
Pattern	Dual 45°
Orifices	2 orifices, 45 degrees apart
Stream angles	±22.5° from the centerline
Orifice diameter	.016 in
Orifice tolerance	±.0005 in
Material	Phosphor brass
Fits	All H200 modules
Store SKU	T2C85B8S

Spray pattern

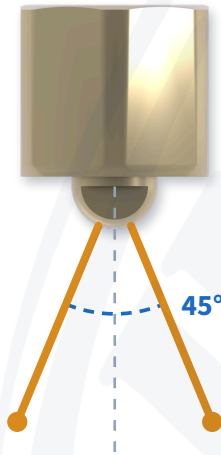

Dual 45°, side view shooting down, drawn to the chart angles.

Cross references

Replaces Nordson®	238528
Also replaces Nordson®	708725
Valco	972xx405

About button nozzles

- Button nozzles are one piece, precision drilled brass with no insert.
- Precision drilled holes shoot straighter.

Where the beads land

Stream	0.5 in 12.7 mm	1 in 25.4 mm	1.5 in 38.1 mm	2 in 50.8 mm	2.5 in 63.5 mm	3 in 76.2 mm
22.5° each side	0.25 6.3	0.46 11.6	0.66 16.8	0.87 22.1	1.08 27.3	1.28 32.6

Product distance from the tip across the top. Offset from the nozzle centerline, inches in bold, millimeters in gray. Approximate: pressure, temperature, viscosity and line speed move the bead.

