




Button Nozzle, Single 30°, .024 Orifice

Domed button nozzle with 1 orifice, 30 degrees off center, .024 in orifice. Fits all H200 modules.

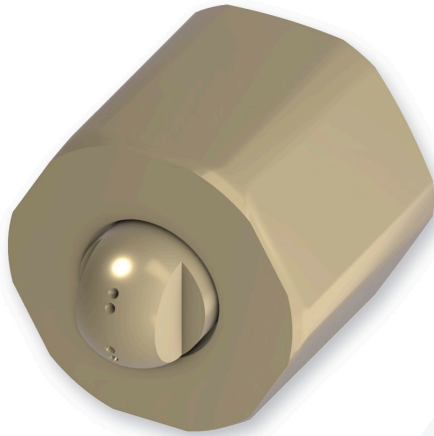


Button body, typical. Orifice layout varies by pattern.

Specifications

Nozzle type	Button (domed)
Pattern	Single 30°
Orifices	1 orifice, 30 degrees off center
Stream angles	30° from the centerline
Orifice diameter	.024 in
Orifice tolerance	±.0005 in
Material	Phosphor brass
Fits	All H200 modules
Store SKU	T8P45B0S

Spray pattern

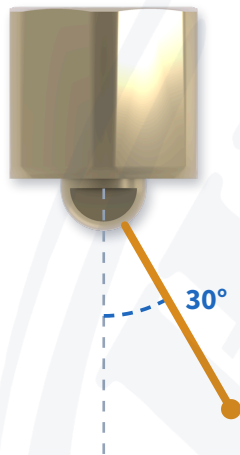

Single 30°, side view shooting down, drawn to the chart angles.

Cross references

Replaces Nordson®	804520
Graco InvisiPac	130822

About button nozzles

- Button nozzles are one piece, precision drilled brass with no insert.
- Precision drilled holes shoot straighter.

Where the beads land

Stream	0.5 in 12.7 mm	1 in 25.4 mm	1.5 in 38.1 mm	2 in 50.8 mm	2.5 in 63.5 mm	3 in 76.2 mm
30°	0.35	0.63	0.92	1.21	1.50	1.79
one side	8.8	16.1	23.5	30.8	38.1	45.5

Product distance from the tip across the top. Offset from the nozzle centerline, inches in bold, millimeters in gray. Approximate: pressure, temperature, viscosity and line speed move the bead.

