
PRODUCT SPECIFICATION · MB2 QUICK SHIP GUN

Replacement for Nordson® 8526667, Dual Module Miniature Gun

HMSC CONFIGURED PART NUMBER
HMS-MB-210210222
Replaces Nordson® 8526667

Preconfigured MB2 2 module miniature gun: 2 mini ball and seat modules, common air, 240 VAC, T standard 6 pin cordset, high speed MAC 26A series solenoid and 100 mesh inline filter. Quick Ship guns are built from stocked subassemblies, so they ship quickly.

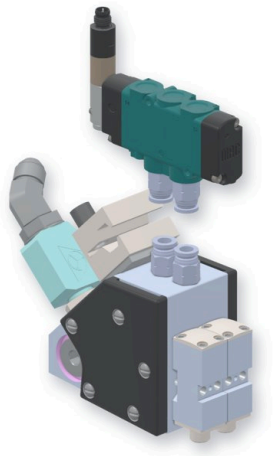

Dual Module Miniature Gun, HMS-MB-210210222

Specifications

Replaces Nordson	8526667
Gun family	MB2 miniature gun
Modules	2
Module type	BEL, mini ball and seat
Orifice	STD, orifice set by the nozzle
Module spacing	16 mm, center to center
Body length	38.1 mm
Hydraulic ports	3

Configuration code

MB2-BEL-STD-02-A-CA-016-T-RB-SP-F4-3

MB2	BEL	STD	02	A	CA	016	T	RB	SP	F4	3
Group	Module type	Orifice	Modules	Voltage	Air type	Spacing	Cordset type	Cordset position	Solenoid	Hydraulic connector	Ports

Electrical

Voltage	240 VAC
Heater	150 W, 240 V
Cordset	T, standard 6 pin
Cordset position	RB, right of the bracket

Read facing the modules, looking down on the bracket (the mounting clamp).

Air and hydraulics

Air type	CA, common air: one valve fires every module
Solenoid	SP, high speed MAC 26A series
Solenoid valves	1
Hydraulic connector	F4, inline filter, 100 mesh, 45 degree fitting

Included with this gun

- Gun body and the correct heater for that body and voltage
- 2 modules, solenoid valve and cordset
- Inline filter, 100 mesh, 45 degree
- Mounting hardware and covers, included with the body

Safety

Guns run at melt temperature under hydraulic and air pressure. Lock out power, relieve pressure and let the gun cool before inspecting it.

Product page

Nordson is a registered trademark of Nordson Corporation. Hot Melt Supply Company is not affiliated with Nordson Corporation. Part numbers are used for identification only. MAC is a trademark of its owner. Specifications are for identification and service reference. Always follow the equipment manual.

PRODUCT SPECIFICATION · MB2 QUICK SHIP GUN

Replacement for Nordson® 8526667, Dual Module Miniature Gun

HMSC CONFIGURED PART NUMBER
HMS-MB-210210222
Replaces Nordson® 8526667

Subassemblies (service parts)

Item	HMSC part number	Qty
Gun body	HMS-MB-200200000	1
Heater	HMS-HNA-28123	1
Mini ball and seat module	HMS-M-1095703	2
Solenoid valve, high speed MAC 26A series, CA	T11B08B6S	1
Cordset T, standard 6 pin	T2K46M5S	1
Inline filter, 100 mesh, 45 degree	T10P72C4S	1

Heater

Heater part	HMS-HNA-28123
Wattage	150 W
Voltage	240 V
Size	3/8 x 1.28 in (diameter x length)

Sold separately

Store SKU	Item	Nordson
HMS-M-1095703	Module	1095703
T11B08B6S	Solenoid valve	1120826
T2K46M5S	Cordset T	274685
T10P72C4S	Inline filter	1007234

Cordset pinout



1	Gun heater
2	Gun heater
3	Gun RTD
4	Not used
5	RTD common
Ground	Ground pin

T cordset, standard 6 pin. Mates with the 6 pin applicator end of packaging hoses. Gun heater 1 and 2, gun RTD 3, RTD common 5, ground. Pin 4 not used.

Gun side connector, as seen looking into the gun connector: the mirror image of the hose applicator end.

Configuration code, field by field

Field	Code	Meaning
Group	**MB2**	MB2 gun (standard and slim line)
Module type	**BEL**	Mini ball and seat
Orifice	**STD**	Standard module, orifice set by the nozzle
Modules	**02**	2 modules
Voltage	**A**	240 VAC
Air type	**CA**	Common air: one valve fires every module

Field	Code	Meaning
Spacing	**016**	Center to center between modules, mm: 16
Cordset type	**T**	Standard 6 pin
Cordset position	**RB**	Right of the bracket
Solenoid	**SP**	High speed MAC
Hydraulic connector	**F4**	Inline filter, 100 mesh, 45 degree fitting
Ports	**3**	Three ports

Not finding what you need? We build custom guns: any module count, spacing, cordset position and options. Call 1-888-202-1788 or email sales@hotmeltsupplyco.com.

Nordson is a registered trademark of Nordson Corporation. Hot Melt Supply Company is not affiliated with Nordson Corporation. Part numbers are used for identification only. MAC is a trademark of its owner. Specifications are for identification and service reference. Always follow the equipment manual.